


CWH3000 SERIES COMMERCIAL FAN-FORCED WALL HEATER

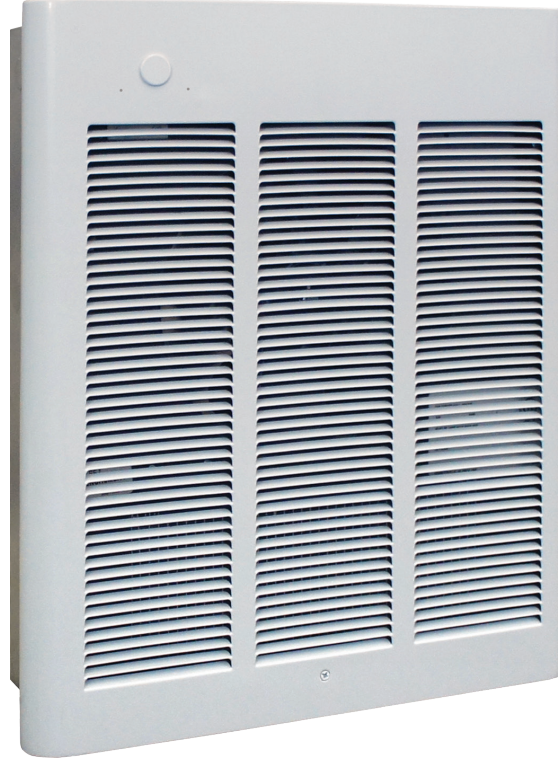

IDEAL SPACES

- Mechanical Rooms
- Vestibules
- Entrance Ways
- Lobbies
- Hallways
- Stairwells
- Restaurants
- Conference Rooms
- Medical Offices
- Basements
- Family Rooms

COLORS

- Northern White

DIMENSIONS

- Grille: 19-5/16"H x 15-3/4"W x 7/8"D
- Back Box: 18-1/4"H x 14-5/16"W x 3-3/4"D

TEMP RANGE

- 40°– 90°F

CFM

- 100

- Contemporary design combined with commercial-grade steel grille to provide comfort through optimized airflow
- Fan-only operation for summer use
- Built-in power on/off switch for added safety during maintenance
- Manual reset thermal overload protector disconnects power in the event of accidental blockage
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Integral double-pole thermostat allows for easy adjustment to maintain desired temperature
- All units have a permanently lubricated enclosed fan motor, which creates long life, low maintenance, and gently distributes warmth throughout the area



www.qmarkmep.com

For Technical Services, Call 800-642-4328

ITEM# QFLY_CWH3000_1217-1



CWH3000 SERIES COMMERCIAL FAN-FORCED WALL HEATER

MODELS & SPECIFICATIONS

CATALOG NO.	UPC	VOLTS	WATTS	AMPS	PHASE	BTU/HR.	SHIP WT. (LBS.)
CWH3150F	6 85360 16238 6	120	1500	12.5	1	5118	25
CWH3180F	6 85360 16240 9	120	1800	15	1	6142	25
CWH3404F*	6 85360 16246 1	240	4000/2000	16.7/8.3	1	13,649/6824	25
		208	3000/1500	14.5/7.2		10,236/5118	
CWH3407F*	6 85360 16248 5	277	4000/2000	14.5/7.2	1	13,649/6824	25
		240	3000/1500	12.5/6.3		10,236/5118	
CWH3307F*	6 85360 16242 3	277	3000/1500	10.8/5.4	1	10,236/5118	25
CWH3408F*	6 85360 16250 8	208	4000/2000	19.2/9.6	1	13,649/6824	25
CWH34083F	6 85360 16250 8	208	4000	11.1	3	13,649	25
CWH34043F	6 85360 16244 7	240	4000	9.7	3	13,649	25
CWH3504F	6 85360 16256 0	240	4800	20	1	16,378	25
		208	3600	17.3		12,284	
		277	4800	17.3		16,378	
CWH3507F	6 85360 16258 4	240	3600	15.0	1	12,284	25
		208	4800	23.1		16,378	
CWH3508F	6 85360 16262 1	208	4800	13.4	3	16,378	25
CWH35083F	6 85360 16260 7	208	4800	13.4	3	16,378	25
CWH35043F	6 85360 16254 6	240	4800	11.6	3	16,378	25
CWH3203F	6 85360 16418 2	347	2000	5.8	1	6824	25
CWH3206F	6 85360 01909 3	600	2000	3.3	1	6824	25
CWH3153F	6 85360 16422 9	347	1500	4.3	1	5118	25
CWH3156F	6 85360 16424 3	600	1500	2.5	1	5118	25
CWH3303F	6 85360 01921 5	347	3000	8.6	1	10,236	25
CWH3306F	6 85360 01924 6	600	3000	5	1	10,236	25
CWH3403F	6 85360 01932 1	347	4000	11.5	1	13,649	25
CWH3406F	6 85360 01943 7	600	4000	6.7	1	13,649	25
CWH3503F	6 85360 01959 8	347	4800	13.8	1	16,378	25
CWH3506F	6 85360 01970 3	600	4800	8	1	16,378	25

NOTE: *Factory-wired for higher wattage, field-convertible to half wattage. For wall mounting – Do not install back box closer than 8 in. from floor or adjacent wall. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed.

ACCESSORIES

CATALOG NO.	UPC	DESCRIPTION	SHIP WT. (LBS)
FRAFCTPF	6 85360 02710 4	Tamper-Proof Front Cover, Northern White	2
CWH3SM	6 85360 02822 4	Surface Mounting Frame, Northern White	5
CWH3S1	6 85360 03036 4	1 in. Semi-Recessed Frame, Northern White	2
CWH3S2	6 85360 03035 7	2 in. Semi-Recessed Frame, Northern White	2
LFKSFNCW	6 85360 16079 5	14-gauge Security Front Cover, Northern White	6

